


alfi.

Booster Series i

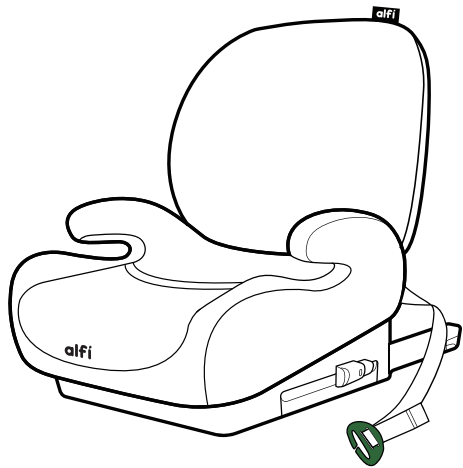

i-SIZE
ECE R129

125-150cm



UNIVERSAL BOOSTER WITH
WAIST CUSHION



Line : @alfibaby

สแกนเพื่อดู
วิดีโอการติดตั้ง



PARTS IDENTIFICATION

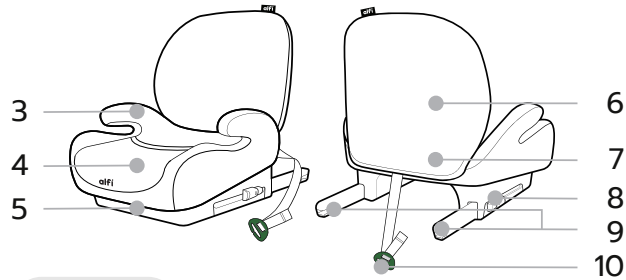


- 1 ISOFIX Insertion Aids
- 2 ISOFIX Fastening Points (vehicle)
- 3 Armrests
- 4 Seat Cover
- 5 Base
- 6 Waist Cushion
- 7 Release Buttons
- 8 ISOFIX Buttons
- 9 ISOFIX Locking Arms
- 10 Vehicle Belt Clip

INSTALLATION


1. ISOFIX

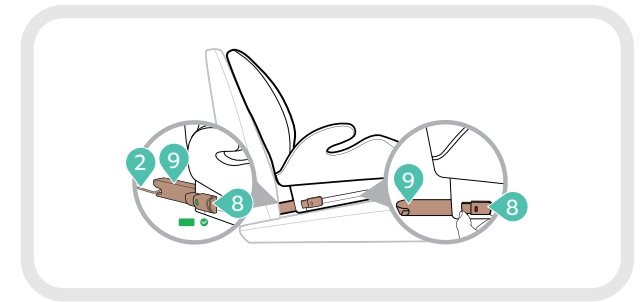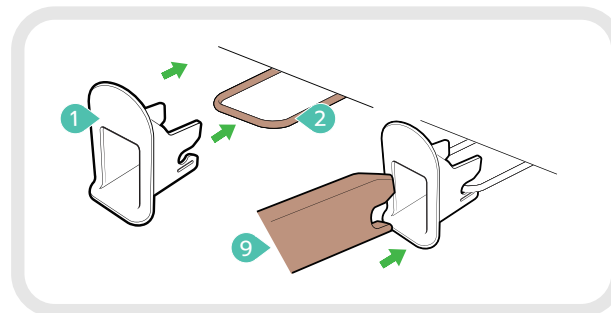

2. How To Use

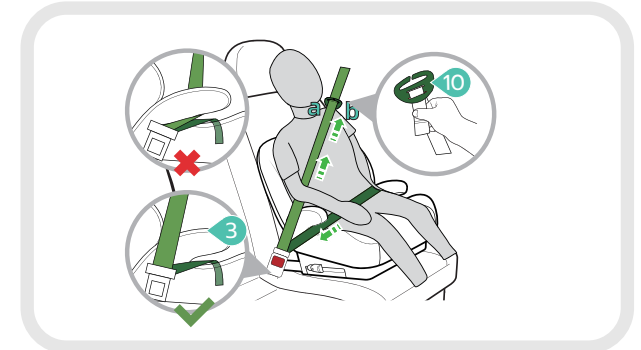

3. WAIST CUSHION

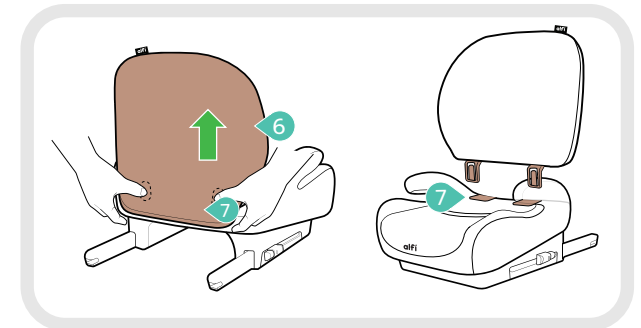

APPROVAL

These instructions use the following symbols:

Symbol	Keyword	Explanation
⚠	DANGER!	RISK of severe personal injury
⚠	WARNING!	RISK of minor personal injury
⚠	CAUTION!	RISK of material damage
ℹ	TIP!	Useful notes

The Booster Series i is exclusively intended to secure your child in your vehicle.

Tested and approved according to ECE R129		
Body Size	Installation Method	Installation Direction
125-150cm	Adult Safety-Belt+ISOFIX	Forward Facing
	Adult Safety-Belt	

*ECE = European Standard for Child Safety Equipment

The child safety seat has been designed, tested and approved according to the requirements of the European Standard for Child Safety Equipment (ECE R129/03).

The seal of approval "E" (in a circle) and the approval number are located on the orange approval label (sticker on the child safety seat).

INSTALLATION

1. ISOFIX

1. If your vehicle is not fitted with [ISOFIX Insertion Aids \(1\)](#) as standard, clamp the two [ISOFIX Insertion Aids \(1\)](#), which are included in the scope of delivery of the seat, with the opening pointing upwards, to the two [ISOFIX Fastening Points \(2\)](#) of your vehicle.

TIP! The ISOFIX fastening points are located between the surface and the backrest of the vehicle seat.

2. Press the [ISOFIX Buttons \(8\)](#) to push out the two [ISOFIX Locking Arms \(9\)](#) from the seat base.

3. Push back the child safety seat until you hear a clicking sound, then ensure both sides of the ISOFIX indicator turn green.

4. Move the child safety seat backward to confirm it is firmly against the vehicle seat.

TIP! Press the release button towards each other to loosen the ISOFIX fastening points on both sides. Move the ISOFIX locking arms back into the seat base to protect ISOFIX.

2. How To Use

ISOFIX+Adult safety-belt or Adult safety-belt only.

1. Place the universal booster cushion on the vehicle seat. If you don't have ISOFIX, please ignore this step. Install the universal booster cushion with the adult safety-belt.

2. Let the child sit in the universal booster cushion. Pull out the belt from the ALR (Automatic Locking Retractor).

3. Guide the shoulder belt into the [Vehicle Belt Clip \(10\)](#) as shown. Adjust the length of the strap to make the shoulder belt slightly higher than the child's shoulder. When fastening the adult safety-belt, make sure the lap belt passes under both [Armrests \(3\)](#), while the shoulder belt is above the armrest.

TIP! Keep the shoulder belt positioned between the outside of the neck and shoulder (in the middle of point a and point b).

WARNING! The adult safety-belt must not be twisted or have their places changed.

Pull the strap and adjust the height of the [Vehicle Belt Clip \(10\)](#) to adapt to children of different heights.

TIP! The importance of ensuring that any lap belt is worn low down so that the pelvis is firmly engaged should be stressed.

Lock the tip of the buckle into the vehicle seat buckle with a clicking sound. Follow the direction of the arrow to tighten the belt and put the redundant belt into ALR. Shake the child safety seat to make sure it is securely attached.

TIP! The shoulder belt section must run diagonally backward. You can adjust the course of the belt with your vehicle's ALR on both sides.

3. Waist Cushion

1. Raise the [Waist Cushion \(6\)](#) at a 90-degree angle. Insert the two plastic tongues of the [Waist Cushion \(6\)](#) into the connection holes of the base.

2. To separate them, press the [Release Buttons \(7\)](#) with your finger.

Whether you remove the [Waist Cushion \(6\)](#) or not, the usage method is the same.

If you don't have a [Waist Cushion \(6\)](#), please ignore it.

CARE AND MAINTENANCE

Universal Booster Cushion

Only use authentic seat covers. The seat cover is an integral part of the universal booster cushion and is key to ensuring the trouble-free functionality of the system. Replacement seat covers are available from your dealer.

The cover can be removed and washed with a mild detergent.

The plastic parts can be cleaned with soapy water. Do not use any caustic cleaning agents (such as solvents).

TIP! Please use only authentic cover from your manufacturer.

DISPOSAL

Please observe the waste disposal regulations in your country.

Disposal of packaging	Container for cardboard boxes
Seat cover	Residual waste, waste incineration
Plastic parts	To be placed in the corresponding container according to labelling
Metal parts	Container for metals

SAFETY NOTES

NOTICE

Notice Regarding Universal booster cushion category Enhanced Child Restraint Systems.

This is a Universal booster cushion Enhanced Child Restraint System. It is approved according to UN Regulation No.129, for use in i-Size compatible and universal vehicle seating positions as indicated by vehicle manufacturers in the vehicle user's manual.

If in doubt, consult the Enhanced Child Restraint System manufacturer or the retailer.

DANGER! ⚠

Please carefully read and make sure you understand all instructions in this manual and in the vehicle handbook relate to child safety seats. Install and use the child safety seat as described in the instruction manual. Failure to do this could result in serious injury even death of your child. Keep the instructions together with the ECRS for future reference.

MAKE SURE any straps holding the ECRS to the vehicle should be tight. Any straps restraining the child should be adjusted to the child's body. Make sure straps should not be twisted.

MAKE SURE the lap vehicle seat belt must be worn in such a way as to properly secure the pelvis of the child.

MAKE SURE the ECRS is changed when it has been subject to violent stresses in an accident.

MAKE SURE the rigid items and plastic parts of a ECRS shall be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.

DO NOT make any alteration or additions to the ECRS without the approval of the Type Approval Authority, or a danger occurs if not following closely the installation instructions provided by the child restraint manufacturer.

HOT! The child seat should be kept away from sunlight if the seat is not provided with a textile cover, otherwise it may be too hot for the child's skin.

DO NOT leave your child unattended in this restraint even for a short time.

MAKE SURE any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.

A) DO NOT use the ECRS without the cover.

B) DO NOT replace seat cover with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.